



# Unleaded Gasoline Rtx<sup>®</sup>-1

## Unweathered

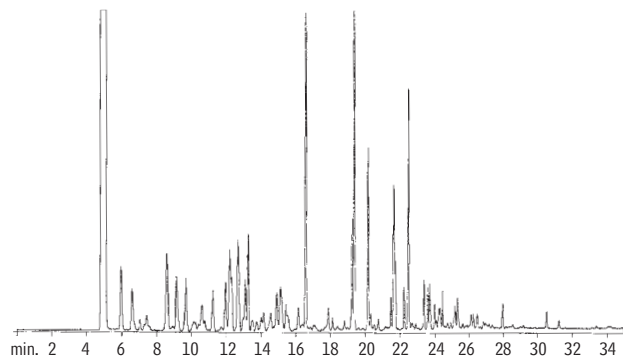

## 99% Weathered

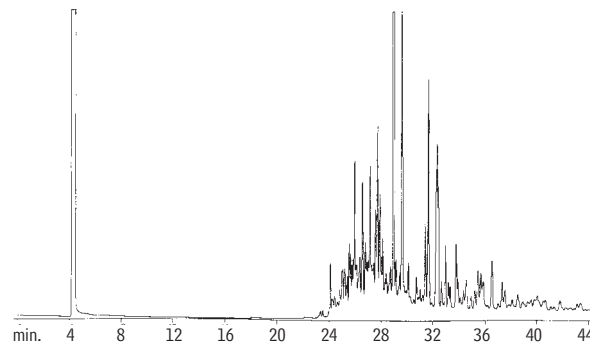

GC\_MS00270

30m, 0.53mm ID, 1.50 $\mu$ m Rtx<sup>®</sup>-1 (cat.# 10170)  
Oven temp.: 40°C (hold 3 min.) to 75°C @  
15°C/min. to 275°C @ 20°C/min. (hold 5 min.)  
Inj./det. temp.: 250°C/285°C  
Carrier gas: hydrogen  
Linear velocity: 50cm/sec. set @ 40°C  
FID sensitivity: 4.10 x 10<sup>9</sup> AFS  
Split ratio: 30:1