


# Silanes Rtx<sup>®</sup>-200

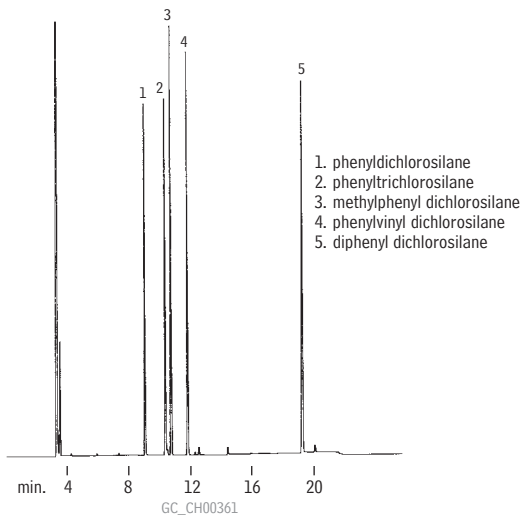

60m, 0.53mm ID, 3.0 $\mu$ m Rtx<sup>®</sup>-200 (cat.# 15088)  
0.5 $\mu$ L split injection of phenyl silanes

Oven temp.: 100°C to 250°C @ 10°C/min.  
(hold 20 min.)  
Inj. / det. temp.: 200°C / 270°C  
Carrier gas: hydrogen  
Linear velocity: 40cm/sec.  
FID sensitivity: 1.02 x 10<sup>9</sup> AFS  
Split vent: 40cc/min.