


# Aromatics (Benzene/Toluene/Xylene) Rtx<sup>®</sup>-Wax

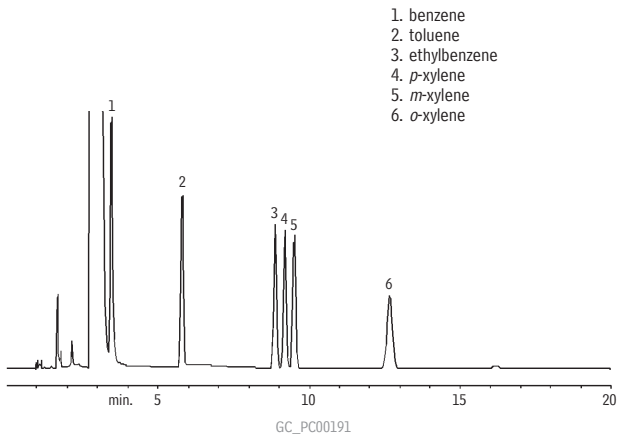

30m, 0.53mm ID, 1.0 $\mu$ m Rtx<sup>®</sup>-Wax (cat.# 12455)  
0.1 $\mu$ L direct injection of BTEX Standard (cat.# 30051)  
Oven temp.: 50°C  
Inj. & det. temp.: 250°C  
Carrier gas: hydrogen  
Linear velocity: 40cm/sec. (flow rate: 5.2cc/min.)  
FID sensitivity: 16 x 10<sup>-11</sup> AFS