

SOL 12 SOLVENTS

1,2-Butadiene and 1,3-Butadiene in Hexane on Thick Film BP1


KEYWORDS:

Butadienes

Part No.: 054081
Phase: BP1, 5.0 μ m
Column: 25m x 0.32mm ID
Initial Temp.: 40°C, 2min
Rate 1: 10°C/min
Final Temp.: 140°C, 1min
Detector: FID, 300°C
Injector Mode: Split, 100:1, 240°C
Carrier Gas: Helium, 6psi
Injection Volume: 1 μ L

Components

1. 1,3-Butadiene
2. 1,2-Butadiene

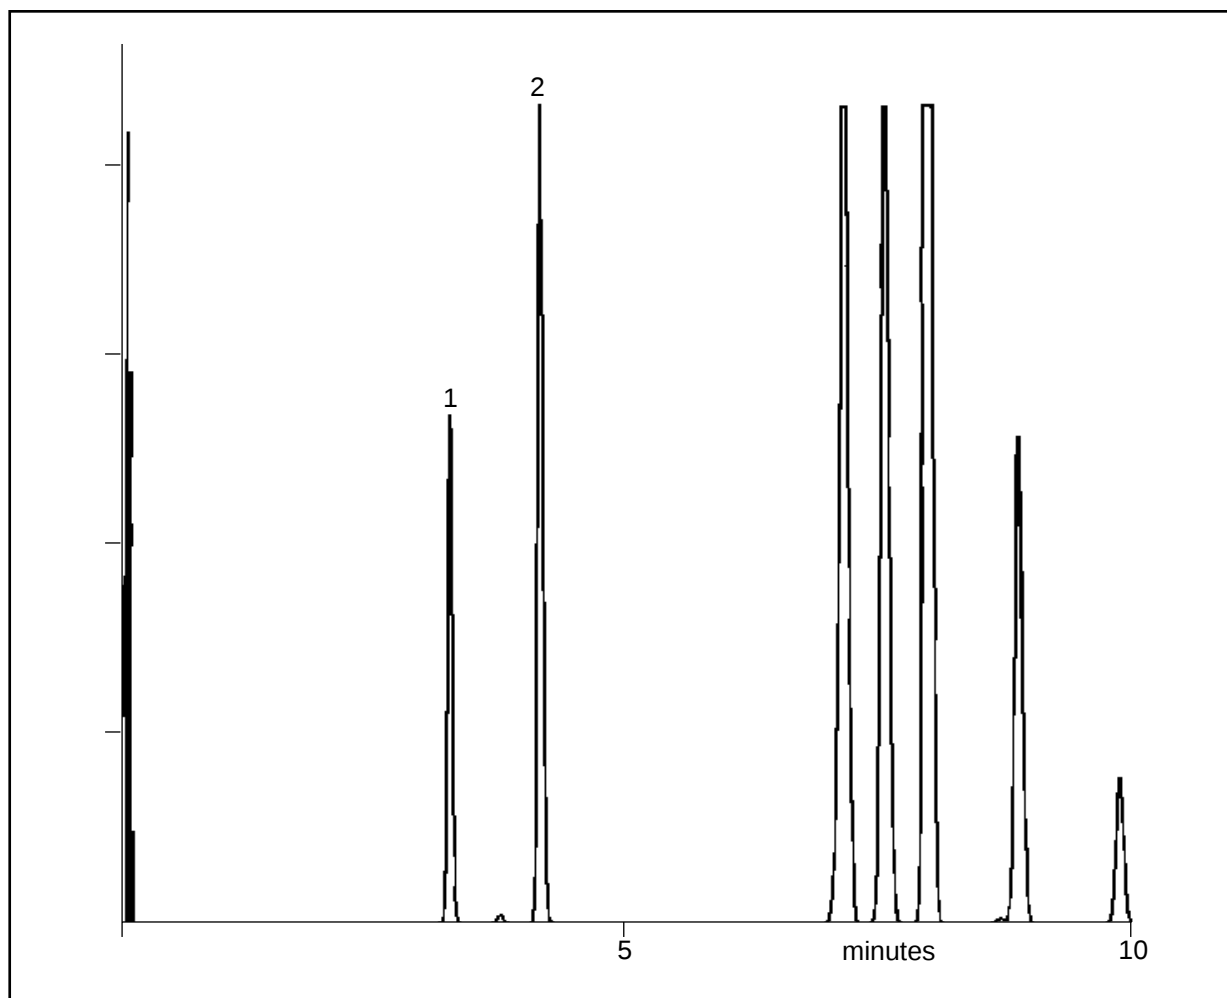

visit www.sge.com or contact our technical Customer Support Team on: techsupport@sge.com

SGE International Pty. Ltd.
email: support@sge.com

SGE Incorporated (USA)
email: usa@sge.com

SGE (France) Sarl
email: france@sge.com

SGE Deutschland GmbH
email: germany@sge.com

SGE Japan Inc.
email: sgejpn@itjit.ne.jp

SGE Australia Pty. Ltd.
email: sales@sge.com

SGE Europe Ltd. (UK)
email: uk@sge.com

SGE (Italia) Srl.
email: sge.italia@tin.it

SGE China Service Centre
email: sge@bj.col.com.cn

SGE India
email: sgeindia@bom4.vsnl.net.in